

UV Sensor Module

GUVA-T21GH




- Features**
- Single Supply Voltage Operation
 - Voltage Output
 - High Sensitivity and Good Solar Blindness
 - Small and Compact Size



Applications UV-A Lamp Monitoring

Outline Diagrams and Dimensions

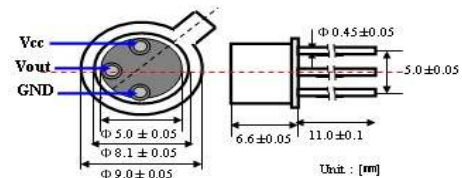


Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	T_{st}	-40	90	°C	
Operating Temperature	T_{op}	-30	85	°C	
Supply Voltage	V_{cc}		5.5	V	
Soldering Temperature	T_{sol}		260	°C	within 10 sec.


Characteristics (at 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply Voltage	V_{cc}	1.8		5.5	V	DC
Supply Current	I_Q		50		μA	
Responsivity	R_p		1.8		mV/nW	at 350 nm
Spectral Detection Range	λ	220		370	nm	10% of R_p
Output Voltage	V_{out}		1.88		V	1 mW/cm ²
Offset Voltage	V_{off}		0.01		V	
Detection Power Range	P	0		2.7	mW/cm ²	$V_{cc}=5V$
Rising Time	T_r		3		ms	

Responsivity Curve

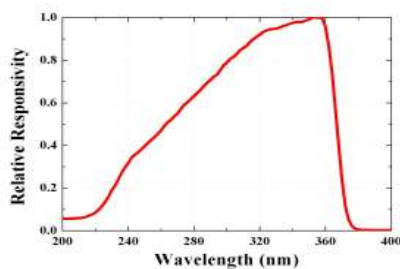

Output Voltage along UV Power

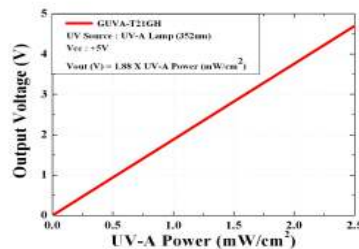

Caution ESD can damage the device hence please avoid ESD.